


ENSTO

Ensto Auguste

SF6 insulated overhead
load-break switch

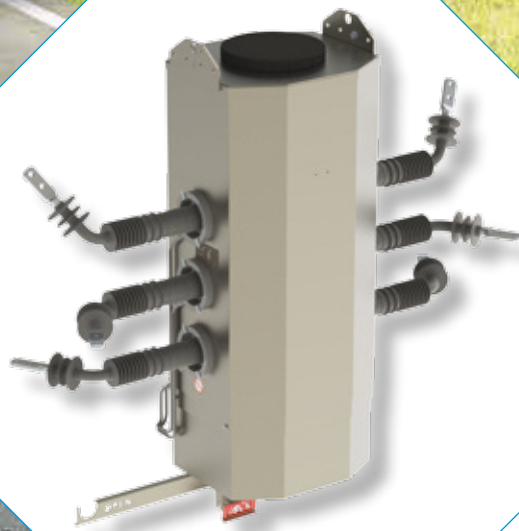

Better life.
With electricity.

Ensto designs and markets smart electrical solutions to improve the safety, functionality, reliability and effectiveness of Smart Grids, buildings and transport.

ensto.com

Ensto Auguste

SF6 insulated overhead load-break switch



Auguste switchgear is an overhead load break disconnecting switch designed to allow a load interruption up to 630 A for a medium voltage (up to 36 kV) electrical overhead line.



This switchgear is convenient for all types of networks, especially for those requiring frequent operations in severe weather conditions.


It is easily installed below the line, on the side of the pole.

The switchgear is extremely reliable, with high-level safety characteristics allowing it to be used with full confidence. Auguste switchgear design is based on extensive experience, in co-operation with the public and private operators

of overhead distribution electrical networks.

The equipment meets many demands :

- Assures quality service
- Easy to install
- Safe to use
- Improves network cost-effectiveness by decreasing the sources of output loss

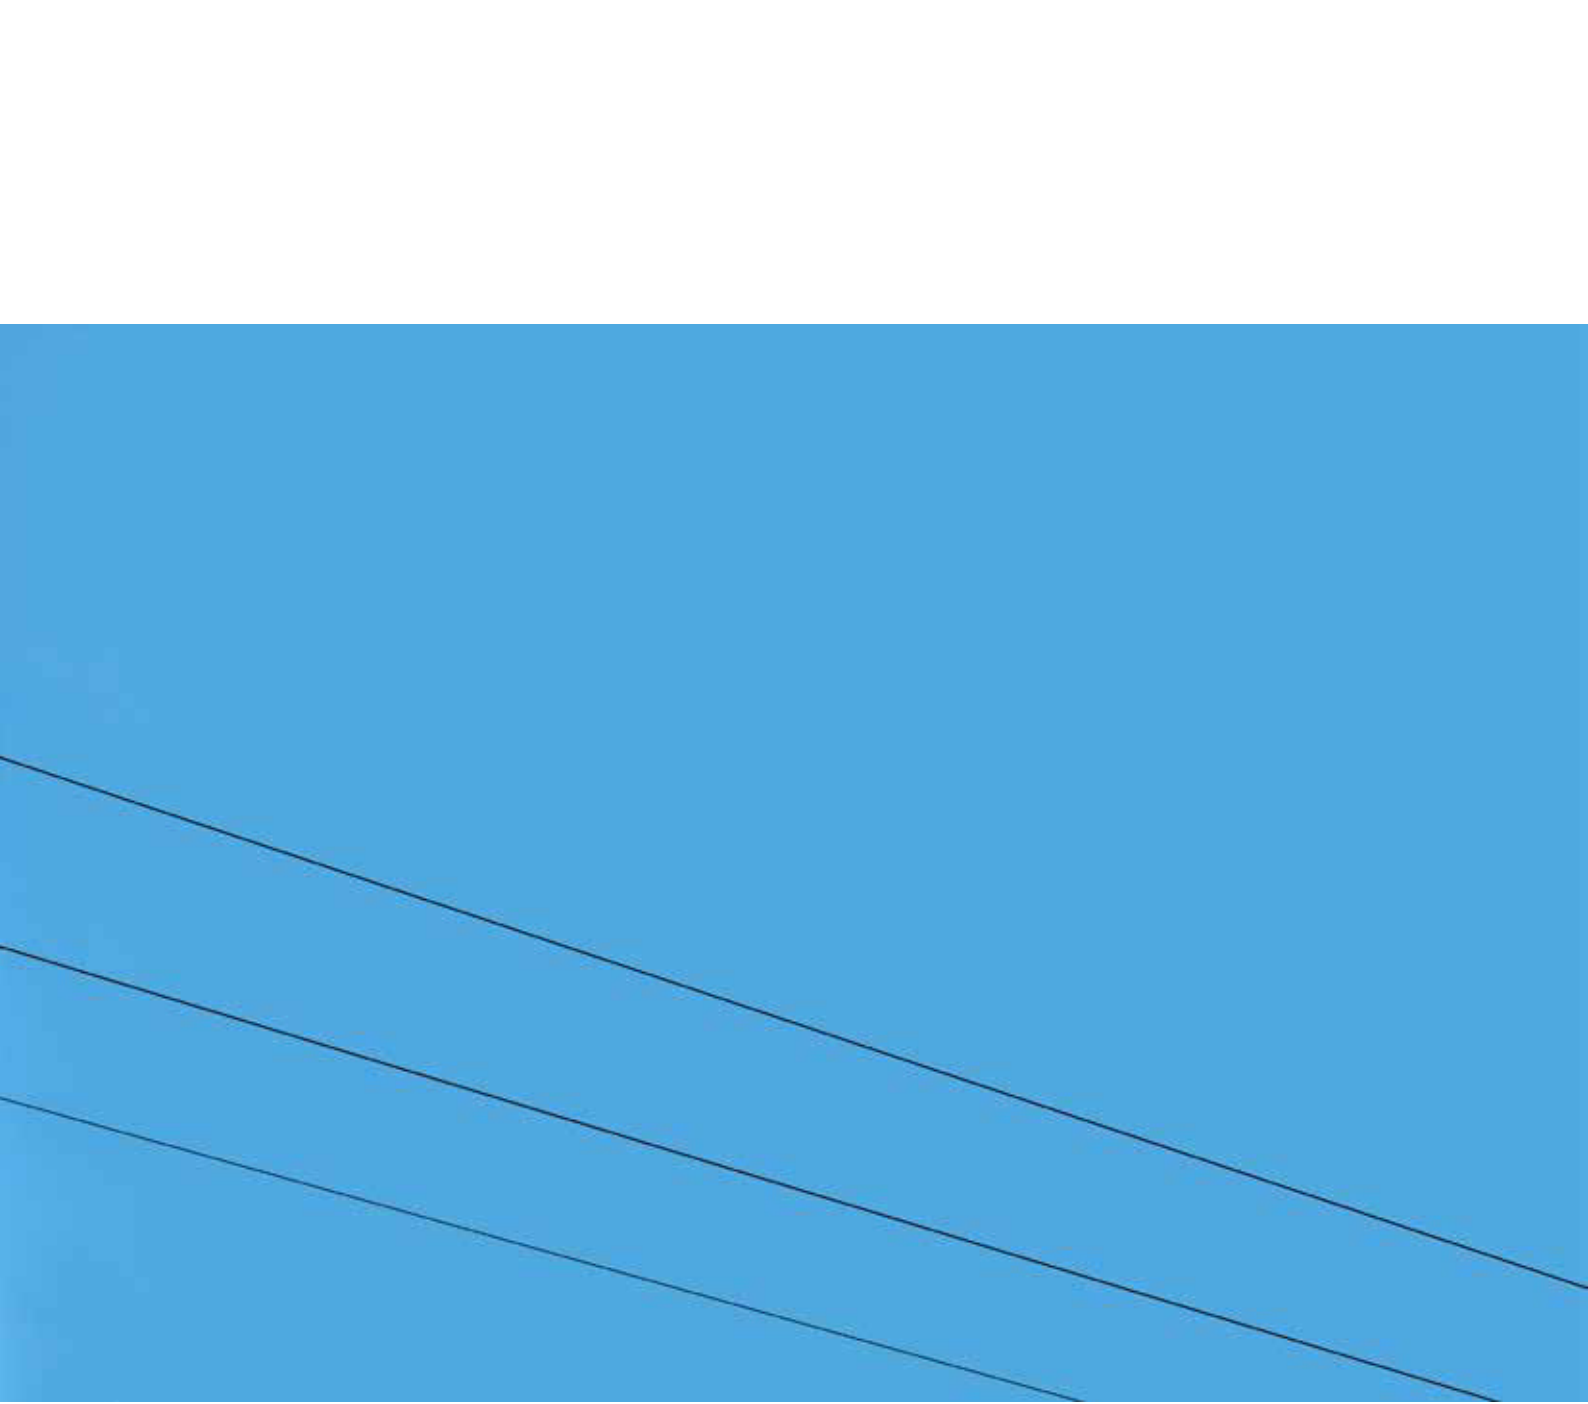

Operational on all continents and subject to the most severe environmental and climatic conditions (saline humidity, rising sand, ice, snow, high altitude, industrial pollution, areas with high-density bird populations, etc.), these switches are valued by operators for their operational simplicity and high reliability.

The switch is used on all types of overhead distribution networks in rural or suburban areas. Auguste switchgear is offered as manual or electrically controlled version. It is designed to be easily inserted in remote SCADA controlled networks.

Standards and testing ensure quality

Auguste switchgear is designed and manufactured according to an ISO 9001-certified quality assurance system. The equipment complies with the recommendations in the most recent editions of international standards and specifications.

Type tests

Auguste load-break switches have successfully undergone all type tests specified in the international standards IEC 62271-103 IEC 62271-102 and IEC 62271-200.

The corresponding test reports are available on request.

Routine tests

All Auguste switches also undergo individual tests during manufacturing as specified by the standards in force, namely :

- Leak-proof tests
- Dielectric tests
- Voltage drop measurement
- Operation tests

Widely applicable

Ensuring reliable electricity distribution networks

Dry climate



Continental climate



Tropical climate



Mild climate



Benefits of our load break switch Auguste



Versatile

- One product - three versions (manual, motorized and remotely operated)
- Customized to meet different customer expectations on various markets globally
- Complete range of options (fault detection, remote control etc.)
- Compatible with the SCADA remote control system



Compact

- Two functions in one device (switch + disconnecter)
- Transformer integrated in the SF6 gas insulated tank
- Built-in selective sectionalizing function



Reliable

- A well-tried solution; long-term relationships with reputed customers
- Operation in extreme climatic conditions all over the world
- Suitable for all types of overhead distribution networks
- Safe and easy to install and use - low pressure, safety vent valve



Durable

- Long life-time with high mechanical and electrical endurance
- Maintenance-free operation with self-lubricating materials
- Vandalism-resistant materials



Sustainable

- Cost-efficient with minimum losses
- Fits into the environment; harmonious, timeless design
- Safe for birds and animals

Ensto Auguste

Variety of options and accessories

The modular design of the Auguste switch range enables the products to be adapted to the constraints of existing networks and to different modes of operation, as well as to future network evolutions.

The load-break switch is installed below the line at the top of the pole. A wide variety of mounting accessories for clamping, strapping or bolting enable the load-break switch to be very easily installed on any type of pole.

Load-break switches with manual control mechanism are operable by rod assembly or hot stick.

The motorized version uses the existing adaptable manual control mechanism as a fall safe operation. By adding a control box, the motorized version can be remote-controlled.

All the accessories needed for automation and telecontrol, such as the current sensors, voltage sensors, fault detectors, sectionaliser automatic control, modems, etc. are specified to enable changes to be made in the already installed equipment.

Auguste switches come with several options :

- Fault detection adapted to different earthing modes
- Sectionalizing function, electrically operated, automatically triggered by the fault detector while the absence of voltage
- Remote control compatible with standard protocols IEC 60870-5-101, IEC 60870-5-104, Modbus RTU, DNP3, HNZ (by adding adequate communication equipment)
- Public or private telephone network
- Radio network
- GSM/GPRS network
- Customer External RTU

Designed to be safe and sustainable

The switch is completely maintenance-free, doesn't require any lubrication and has low pressure SF6 gas which enables at least a 30-years operating life without gas refilling.

Another important factor taken into account in the design is the safety for people and operators:

- A safety valve fitted to the switch's sealed enclosure avoids any risk of explosion. If an internal arc occurs, the gas escapes upwards by the safety valve.
- An indicator mechanically linked to the contact operation shaft clearly shows the load-break switch's position. This indicator is visible from the base of the pole.
- The design of the breaking chamber enables the dielectric withstand across open contacts, even in the air.

Controller

The control box controls and operates the switch locally and remotely (if equipped with remote control and communication equipment).

The box's modular design takes into account user needs in ease of use, configuration, diagnostics and maintenance.

The box enclosure is made of stainless steel. It is made of the following modules :

- Power supply
- Electrical control module
- CPU module
- Fault detection module



Characteristics

	UNIT	Auguste 24	Auguste 36
Rated voltage (Ur)	kV	24	36
Rated current (Ir)	A	400-630	400-630
Frequency (f)	Hz	50-60	50-60
Rated breaking current (A)	A	400-630	400-630
- Mainly active load	A	400-630	400-630
- Closed loop	A	25	25
- No-load transformer	A	40	40
- Line-charging	A	40	40
- Cable-charging	A	40	40
Rated lightning impulse withstand voltage (wave 1.2/50 µs)	kV	125	170
- Common value	kV	145	195
- Across the isolating distance			
Rated power-frequency withstand voltage 1 min	kV	50	70
- Common value	kV	60	80
- Across the isolating distance			
Rated short-time withstand current	kA	12.5	12.5
- 3-sec duration	kA	20	20
- 1-sec duration	kA peak	50	50
- peak			
Rated short-circuit making current	kA peak	31.5	31.5
Internal fault current in accordance with IEC 60298	kA	12.5	12.5
Electrical endurance	Class	E3	E3
Mechanical endurance	Class	M2 5000 opening/closing operations	
Protection index	IP	IP 68 IP 45 (IP 65 on demand) IP 55	
- Leak-proof tank			
- Mechanism			
- Control box			
Temperature range	°C	-25°C + 40°C (-50 °C Version available on demand)	
Operation under ice	mm	20 mm	
Humidity	% a °C	95 % at 40°C	

Available Options:

- Model for very low temperatures up to -50 °C
- Homopolar transformer for low current detection
- Pressure switch for SF6 low pressure detection
- Installation of plug-in terminals instead of bushings for the connection of the MV network
- Sealed tank containing pressurized SF6 gas (fluorinated greenhouse gas).
- Filling pressure = 1.3 bar (Auguste -25°C) and 1.55 bar (Auguste -50°C).
- Leakage rate tested < 0.1% / year.



Total quantity of SF6 - Kg	Equivalent CO2 - Tonne	Switch type
1.57	35.8	Export -25°C
1.71	39	Export -50°C

Dimensions and weights of main sub-units

Auguste 24 - 36 kV	H (mm)	L (mm)	P (mm)	Weight (kg)
Load-break switch assembly without VT, with manual control mechanism	1150	1490	511	105
Load-break switch assembly with VT, with motorised control mechanism	1150	1490	511	140 (*)
Controller	640 (**)	330	370	15
Retractable lever and rod assembly				13

(*) : 155 kg for 36kV versions

(**) : also available in extended version

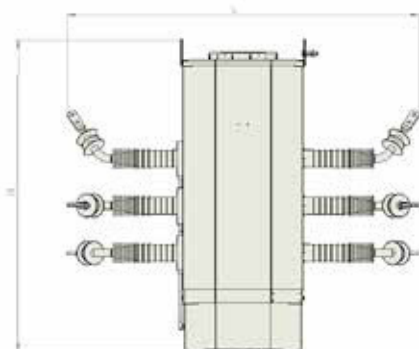



ENSTO

Ensto Novexia SAS

210, rue Léon Jouhaux - BP 10446
FR - 69656 Villefranche-sur-Saône cedex
Tel: +33 (0)4 74 65 61 61
Fax: +33 (0)4 74 62 96 57
Email: infos.novexia@ensto.com

ensto.com



NARACO

Naraco Company Limited

Room 404, EVD Building, 431 Tam Trinh Str
Vinh Hung Ward, Hoang Mai Dist, Hanoi
Tel: +84 (24) 3 2020 980
Hotline: +84 (0) 904 866 966
Email: info@naraco.vn

naraco.vn

